
Firma: Player 387 doo
Adresa: Njegoševa 16
Telefon: +387 55 209 104
Fax:
PIB: 403444110009
E-mail: porudzbine@player.ba

Eversolo DMP-A6 Master Edition Network Audio Streamer Mrežni plejer

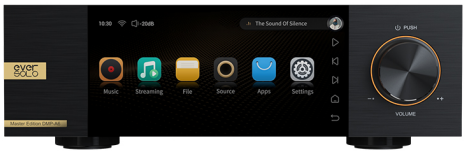

Šifra: 18097
Kategorija prozivoda: Network Plejeri
Proizvođač: Eversolo

Cena: 1.997,00 KM

The DMP-A6 Master Edition is powered by the same quad-core ARM Cortex-A55 professional processor as can be found in the regular DMP-A6. Likewise, a Qualcomm QCC5125 Bluetooth 5.0 module with aptX HD support delivers high-quality wireless audio streaming. Its low-noise, high-quality power supply ensures a pure power source for the audio circuits, minimising distortion, and noise interference.

Visually, you can expect the same solid aluminium alloy chassis, sleek brushed panel, and contemporary LCD-touch display as the regular model. However, you'll notice new luxurious gold detailing on the front panel to truly set the Master Edition apart.

Since it is intended for professional audiophile and recording applications, you can be confident in achieving the very best sound from the Master Edition. Buy yours while stocks last!

What's in the Box?
Eversolo DMP-A6 Master Edition Network Audio Streamer
Power cable
USB cable
Screwdriver
User manual

Model	EVERSOLO DMP-A6ME
Dimensions (L x W x H)	187 x 270 x 90 mm
Rated Power	13W

Display	6" LCD touchscreen
Internal Memory	4GDDR4 +32GeMMC
DAC	ES 9038Q2M*2
Audio Processor	XMOS XU316
Op-amp Chip	OPA1642
Power Supply	Low noise, high quality switching power supplies
SSD	M.2 NVME 3.0 2280 protocol, up to 4TB
USB-A Port	USB3.0*2
Ethernet	RJ-45(10/100/1000Mbps)
WiFi	WiFi 2.4G+5G dual band
Playback and DAC Decoding	Support up to stereo DSD512, PCM 768KHz 32Bit, MQA
Music Service	Tidal, Qobuz, Highresaudio, Amazon, WebDAV, UPnP
Streaming	Air Play, DLNA, Spotify, Tidal Connect, Qobuz Connect etc.
Bluetooth Audio Input	Bluetooth BT5.0, support SBC/AAC/aptX/aptX LL/aptX HD/LDAC
USB-C Audio Input	USB Audio Compatibility: Windows (7, 10), Mac, Android, IOS
Optical/Coaxial Audio Input	Support up to stereo PCM 192KHz 24Bit, DSD64 Dop, MQA
Optical/Coaxial Audio Output	Support up to stereo PCM 192KHz 24Bit, DSD64 Dop, MQA
HDMI Audio Output	DSD64 Native multi-channel/PCM192KHz multichannel raw output(Up to 5.1)
Control Method	Mobile App Touch screen control
XLR Output Audio Characteristics	Output level: 5.2V
RCA Output Audio Characteristics	Output level: 2.6V
PSU	AC 110~240V 50/60Hz

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.